


JADEVER[®]

JCE & JWE SERIES

Weighing World

Make weighing so easy

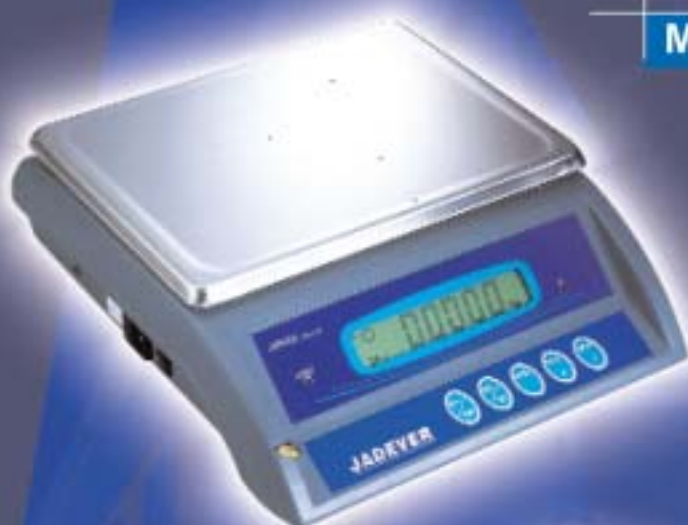

JWE



JCE



CE

JWE/JCE Common Features

- Water-resistant durable keypad
- Auto calibration
- Auto power off / Auto backlight
- Accumulation function
- HI/LO/OK setting can be stored
- 1/150,000 internal resolution
- HI/LO/OK alarm function
- Bi-direction RS-232 interface(optional)
- 4 filter levels for JWE
- 2 filter levels for JCE
- Stainless steel weighing pan
- Internal battery charger
- Clear LCD display with backlight
- Overload and delivery protection

Dimension



JWE/JCE Specifications

Models	JWE-3K	JWE-6K	JWE-15K	JWE-30K
Capacity	3kg	6kg	15kg	30kg
Readability	0.1g	0.2g	0.5g	1g
Weighing Modes	kg · lb · g · % · pcs · lb-oz · fl.oz · fl.H · fl.C			
Display	LCD With Backlight, 25 (H) x 8 (W) mm, 6 digits			
Pan Size	337 x 248 mm Stainless steel			
Dimensions	348(W) x 404(D) x 124(H)mm			
Battery Life(Approx.)	120 hours			
Operating Temp.	-5°C ~ 40°C (23°F ~ 104°F)			
Power	110, 220 VAC ± 10%, 50/60 Hz			
Net Weight	5.4kg			
Shipping Dimension	430(W) x 490(D) x 200(H)mm			

Units of fl.oz · fl.H · fl.C are for Chinese market only

Models	JCE-3K	JCE-6K	JCE-15K	JCE-30K
Capacity	3kg	6kg	15kg	30kg
Readability	0.1g	0.2g	0.5g	1g
Count Resolution	0.08g	0.16g	0.4g	0.8g
Weighing Modes	lb · g			
Display	LCD With Backlight, 14(H) x 7 (W) mm Weight: 5 1/2 Digits, Unit Weight: 5 Digits, Total Count: 5 Digits			
Pan Size	337 x 248 mm Stainless steel			
Dimensions	348(W) x 404(D) x 124(H)mm			
Battery Life(Approx.)	120 hours			
Operating Temp.	-5°C ~ 40°C (23°F ~ 104°F)			
Power	110, 220 VAC ± 10%, 50/60 Hz			
Net Weight	5.4kg			
Shipping Dimension	430(W) x 490(D) x 200(H)mm			

JWE/JCE Accessory



BP-443D



SH-24

T.U.: +0.000 kg
N.U.: +2.000 kg
G.U.: +2.000 kg

G.U.: +2.5000kg
U.U.: 0.5000g/pcs
Total: 5000pcs

JADEVER®

Jadever Scale Co., Ltd.
No.5, Wu-Chuan 2Rd., Wu-Ku Hsiang, Taipei Hsien, Taiwan
Tel: 886-2-2299-0203 Fax: 886-2-2299-0204
http://www.jadever.com.tw E-mail: jadever@jadever.com.tw

Jadever Weightech, Inc.
275 Calvert Road, Markham, Ontario, Canada L6C 1V1
Tel: 1-905-887-4688 Fax: 1-905-887-4006
http://www.jadeverscale.com E-mail: info@jadeverscale.com

Distributed by